





HD

Lift and turn tables

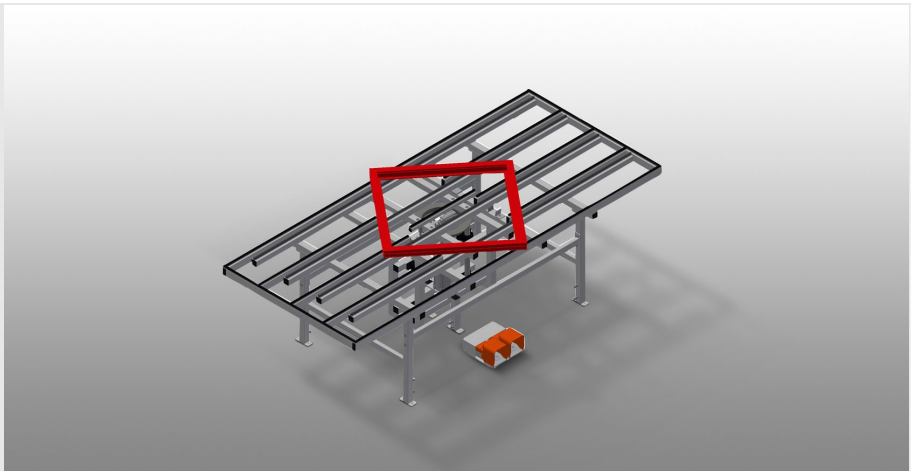


Lift and turn table for assembly and gasket insertion. Stable steel construction. Ideal for assembly and gasket insertion. Adjustable height. Inner table height pneumatically adjustable. Inner table can be rotated; with pneumatic fixing brake. Inner table equipped with rubber strips. Outer table with plastic slide bars. 4-fold compressed air supply.



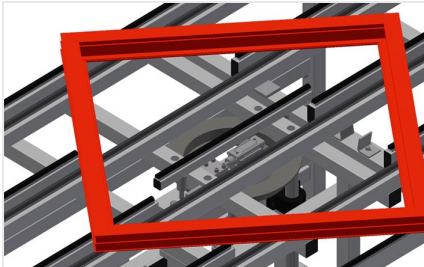


Lift and turn mechanism

Practical for hardware assembly as well as for final assembly and gasket insertion. Inner table height pneumatically adjustable. Inner table can be rotated; with pneumatic fixing brake

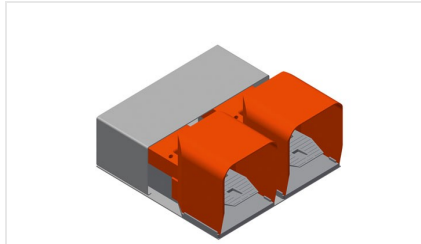

Foot switch

Control via foot valve

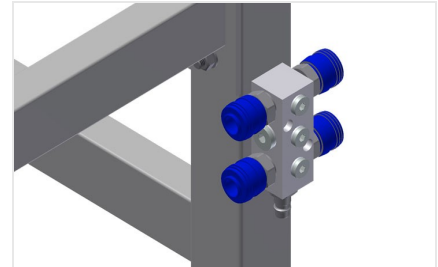


4-fold compressed air connection

4-fold compressed air connection for connecting compressed-air tools



Supporting surfaces

Outer table with plastic slide bars. Inner table equipped with rubber strips.

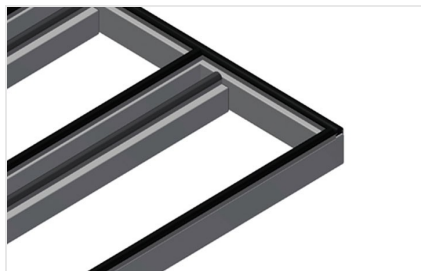

Outer table with rubber strips

Outer table rubber-knob profile for HD 3000. Outer table also available with rubber strips on request.





HD / LIFT AND TURN TABLES

MODELS

HD 3000



DIMENSION AND WEIGHT

| | |
|-------------|-------|
| Length (mm) | 3.000 |
| Width (mm) | 1.300 |
| Weight (kg) | 240 |

SUPPORTING SURFACE

| | |
|----------------------------------------|------------|
| Adjustable height (mm) | 850 ÷ 1000 |
| Travel of pneumatic inner table (mm) | 150 |
| Load capacity (kg) | 200 |
| Outer table surface with rubber strips | ○ |

CHARACTERISTICS

| | |
|---------------------------------|----|
| Operating air pressure (bar) | 7 |
| Air consumption approx. (l/min) | 35 |

Included ● Available ○