
KF 78

COPY ROUTERS

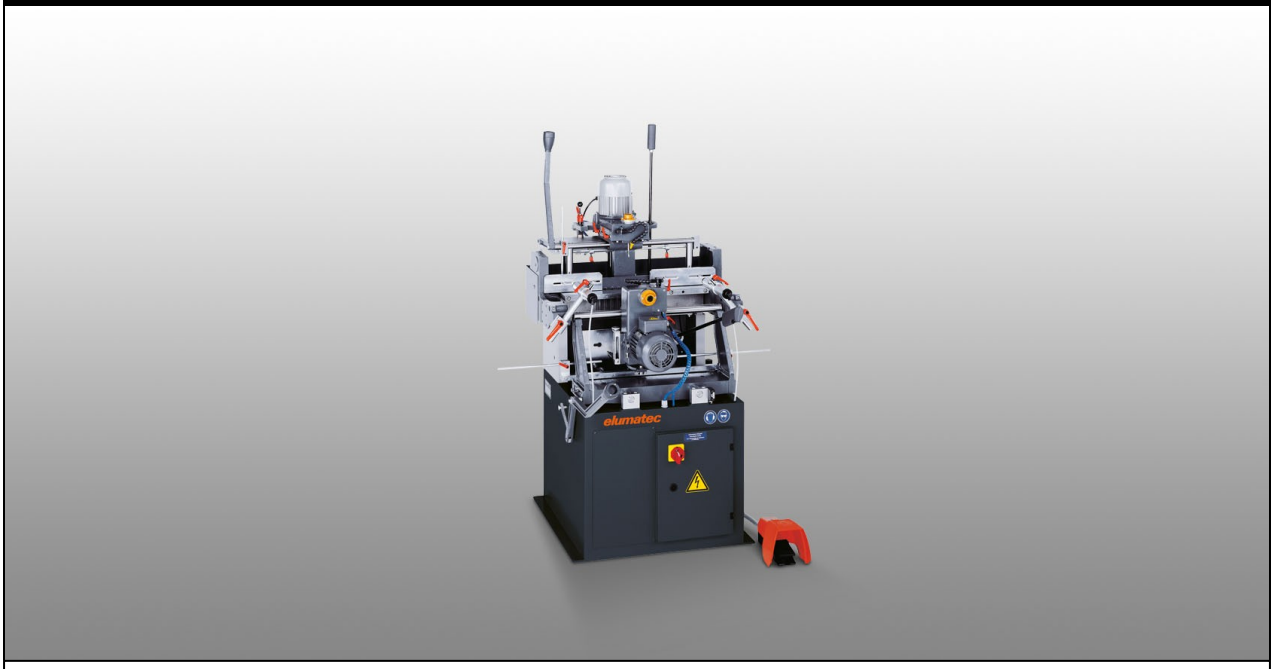

- For routing lock cylinders and handle holes up to a profile thickness of 70 mm
- Routing in two planes (vertical and horizontal) using two copy routing units which operate completely independently
- Copy routing at a ratio of 1:1 using both router spindles
- Routing using stops or copy templates
- Plastic-coated table protects profile surfaces
- Pneumatic clamping, horizontal
- Pulsed coolant system

Options

- Copy templates
- Copy template blanks
- Collets
- Stands and guide bars
- Workpiece supports and stops
- Cutting tools
- High performance cutting fluid


elumatec AG
Pinacher Straße, 61
75417 Mühlacker
Germany

Tel +49 7041-14-184
sales@elumatec.com
www.elumatec.com

The right to make technical alterations is reserved.



2-spindle copy router KF 78/23

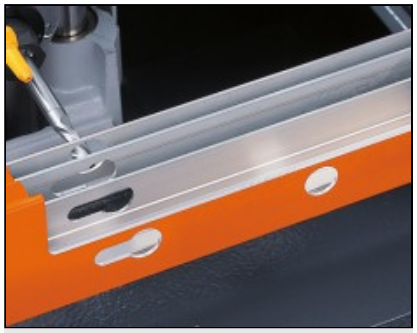

2-spindle copy router KF 78/23



2-spindle copy router KF 78/23

elumatec AG
Pinacher Straße, 61
75417 Mühlacker
Germany

Tel +49 7041-14-184
sales@elumatec.com
www.elumatec.com

The right to make technical alterations is reserved.