



TECHNICAL SHEET

06/08/2025

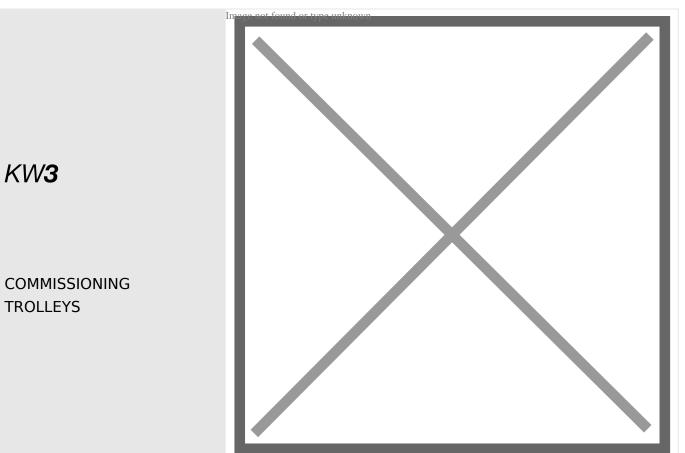

Commissioning trolley for in-house transportation of window elements

- Stable steel construction
- For in-house transportation
- Profile supports with rubber surface
- Can be nested when not loaded a space-saving feature
- Four castors, two of which have a fixing brake



TECHNICAL SHEET

06/08/2025




Commissioning trolley KW 3




Casters

Four casters, two of which have a fixing brake, provide a high degree of mobility and easy, safe handling



Supports with rubber strip

Supporting surfaces equipped with rubber strips to protect profiles from damage



Transport handles

Transport handle on both sides for mobility



/p**elumatec/AG**Pinacher Straße, 61
75417 Mühlacker
Germany

Tel +49 7041-14-184 sales@elumatec.com www.elumatec.com The right to make technical alterations is reserved.



TECHNICAL SHEET

06/08/2025

KW 3 / COMMISSIONING TROLLEYS

- Length 1,600 mm
- Width 1,130 mm
- Height 1,960 mm
- Weight 90 kg
- Load 400 kg
- Roller diameter 125 mm



Pelumatec AG Pinacher Straße, 61 75417 Mühlacker Germany Tel +49 7041-14-184 sales@elumatec.com www.elumatec.com The right to make technical alterations is reserved.