


KW4


COMMISSIONING TROLLEYS

Image not found or type unknown

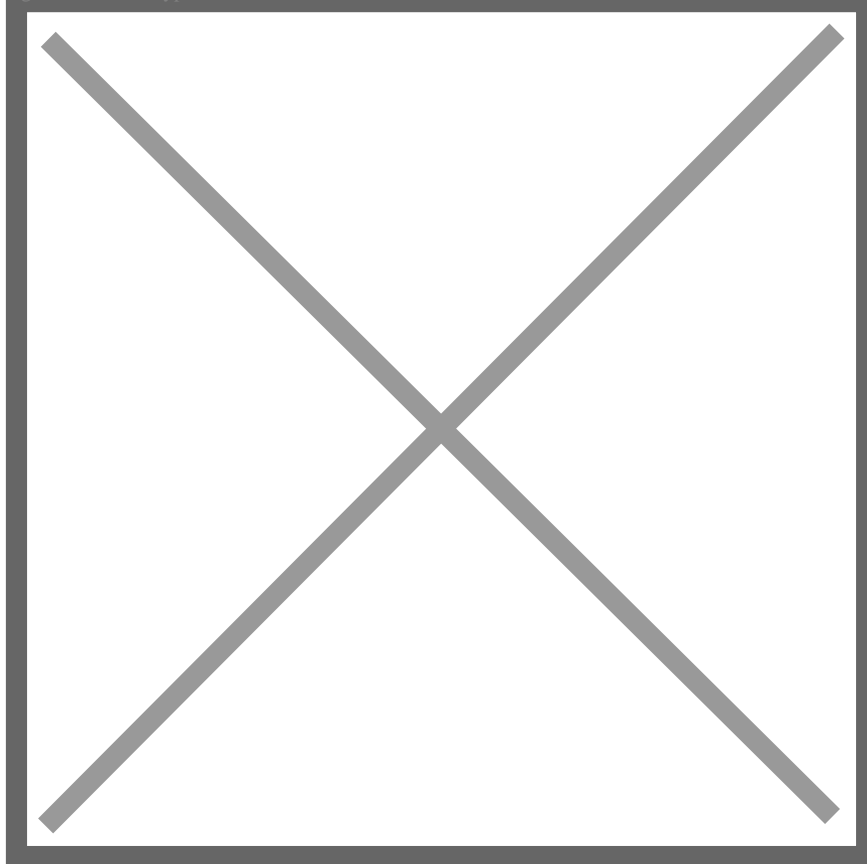


Commissioning trolley for in-house transportation of window elements

- Stable steel construction
- Trolley for in-house transportation
- Openings for forklift transportation
- Four loops for crane transportation
- Four lashing strap attachment points
- Profile supports with rubber surface
- Castors can be removed for increased stability of the commissioning trolley
- Four castors, two of which have a fixing brake

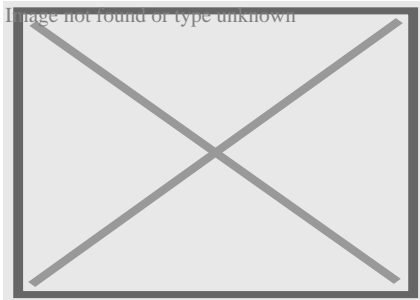


Commissioning trolley KW 4

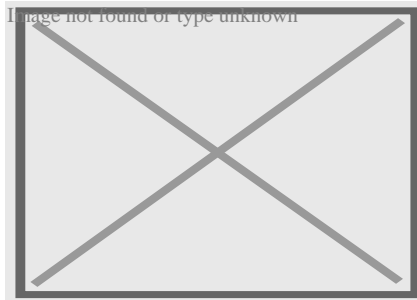

Casters

Four casters, two of which have a fixing brake, provide a high degree of mobility and easy, safe handling

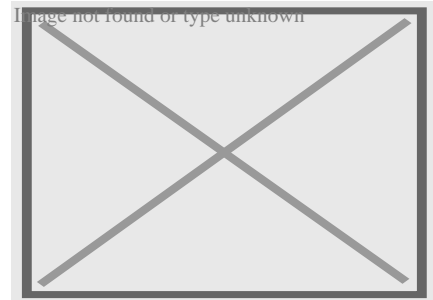

Forklift openings and crane attachment points

Equipped with four forklift openings and four crane attachment points




Lashing strap attachment points

With four lashing strap attachment points





Lifting station

HBR 1600 Lifting station for the transfer of heavy windows to the transport trolley KW 4

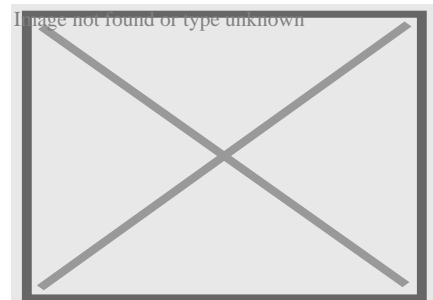


Removable casters

Castors can be removed for increased stability of the commissioning trolley on the floor

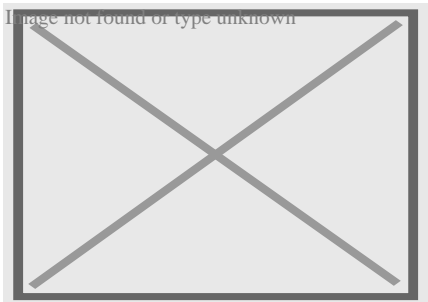

Supports with rubber strip

Supporting surfaces equipped with rubber strips to protect profiles from damage



elumatec AG
Pinacher Straße, 61
75417 Mühlacker
Germany

Tel +49 7041-14-184
sales@elumatec.com
www.elumatec.com

The right to make technical alterations is reserved.



Image not found or type unknown

TECHNICAL SHEET

06/08/2025

KW 4 / COMMISSIONING TROLLEYS

- Length 2,000 mm
- Width 1,000 mm
- Height 1,850 mm
- Weight 150 kg
- Load 500 kg
- Roller diameter 125 mm




Image not found or type unknown
elumatec AG
Pinacher Straße, 61
75417 Mühlacker
Germany

Tel +49 7041-14-184
sales@elumatec.com
www.elumatec.com

The right to make technical alterations is reserved.