



## MGS72

### Mitre saws



- Stable, ground, continuous support table with turn table on precision bearings
- Wear-resistant and quiet multi-V belt drive
- Manual saw feed
- Equipped with saw blade as standard
- Table-top unit

#### Options

- Machine base
- Pneumatic material clamping unit
- Quick-acting clamping device
- Length stop and measuring systems
- Roller conveyors
- Saw blades
- Pulsed coolant system
- High performance cutting fluid

#### MITRE SAW MGS 72/10

See MGS 72/30, however:

- Machine base
- Pneumatic material clamping units: 2x horizontal, 1x vertical
- Pulsed coolant system


#### Technical specifications

- Length 780 mm, depth 900 mm, height 1,600 mm, weight 210 kg




### Mitre saw MGS 72/10

MGS 72/10 + MMS 100 + roller conveyor

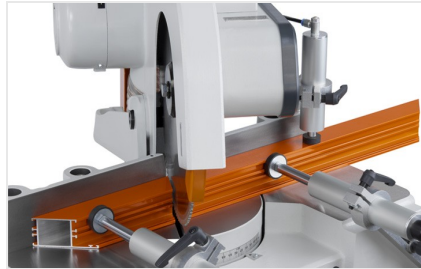

### Mitre saw MGS 72/30

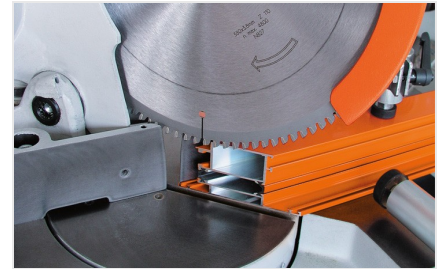

### Mitre saw MGS 72/30



### Mitre saw MGS 72/30

Cutting diagram MGS 72/30



elumatec AG  
Pinacher Straße, 61  
75417 Mühlacker  
Germany

Tel +49 7041-14-184  
sales@elumatec.com  
www.elumatec.com

The right to make technical alterations is reserved.



### MGS 72 / MITRE SAWS

---

- **MGS 72/10 - MGS 72/30**
- Pivoting range from 0° - 45°, continuously adjustable to the left and to the right
- Positive location points at 15°, 30°, and 45°
- For cutting range, see cutting diagram
- Saw blade diameter 380 mm
- Saw blade speed 2,800 rpm
- Power supply 230/400 V, 3~, 50 Hz
- Power output 3 kW
- Length 780 mm, depth 900 mm, height 815 mm, weight 120 kg