


RMT1400

Tilting tables

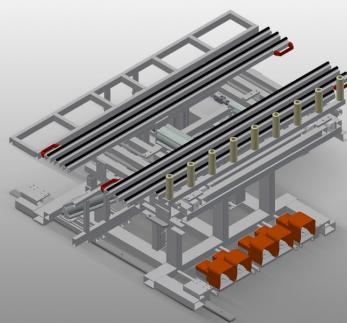

- Stable steel construction
- Tilting assembly table with draw-in unit
- Basic dimensions 1,400 x 2,000 mm, when pulled out 2,000 x 2,800 mm
- Pull-out work platform consisting of two supporting beams, clad with brush strip
- Minimum size of work platform 2,000 x 1,000 mm
- Maximum size of work platform 2,800 x 2,000 mm
- Two supporting beams form a frame, the height of which can be adjusted pneumatically and continuously from 1,000 to 2,000 mm
- Lifting and tilting unit with foot valve
- Fixed roller conveyor with lifting unit, 100 mm
- Lifting unit for transferring / receiving from the roller conveyor
- Roller conveyor open at front for drawing in to transfer roller conveyor
- Mobility unit with flanged rollers and pneumatic fixing brake with operation from side

Optional

- Table supporting surface with felt profile strip for RMT 1400
- Auxiliary clamp with hand valve

**Tilting assembly table with draw-in unit**

Tilting assembly table with draw-in unit for mounting prefabricated roller shutter boxes onto window elements

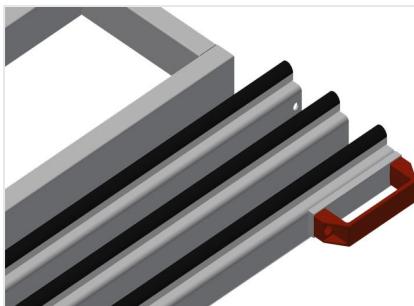
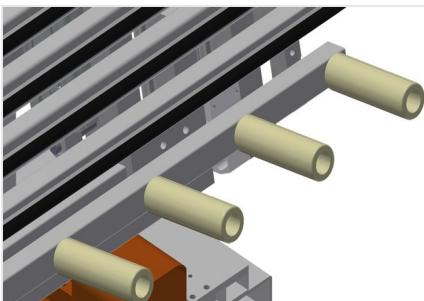
**Supporting surface**


Table supporting surface with brush strips

**Worktable**


Height of support table adjustable to 230 mm below the work surface. Depth of support table 250 mm, length 2,000 mm

**Roller support**


Roller conveyor open at front for drawing in to transfer roller conveyor. Fixed roller conveyor with lifting unit, 100 mm Lifting unit for transferring / receiving from the roller conveyor.

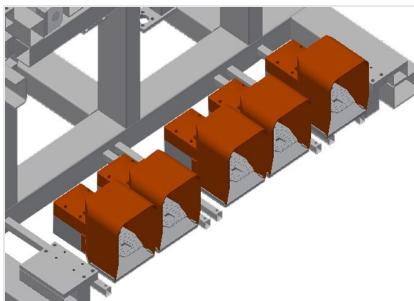**Foot switch**

Control via foot valve. Lifting and tilting unit with foot valve

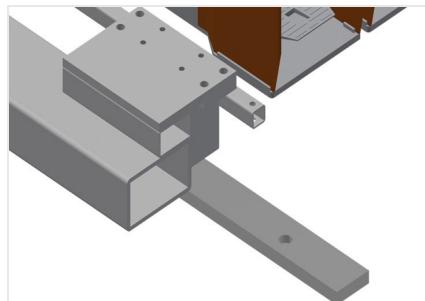**Mobility unit**

Mobility unit with flanged rollers and pneumatic fixing brake with operation from both sides

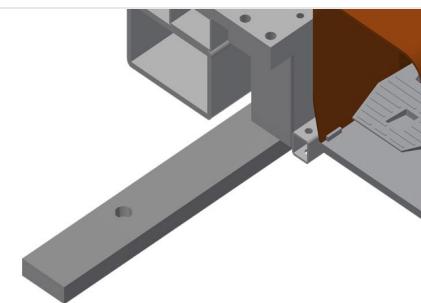

Rail

Rails, 2.0 m, left and right



Felt strip

Supporting surfaces with felt profile strip



Auxiliary clamp

Auxiliary clamp with hand valve for RMT 1400. Auxiliary clamps provide extra security when machining.

RMT 1400 / TILTING TABLES

- Working height 950 mm
- Roller conveyor length 1,600 mm
- Roller diameter 50 mm
- Roller length 150 mm
- Tilt of supporting surface 8°
- Depth of support table 200 mm
- Length of support table 2,000 mm
- Weight 450 kg
- Load 300 kg
- Length 2,000 mm
- Width 1,620 mm