




### TS161

#### Table saws

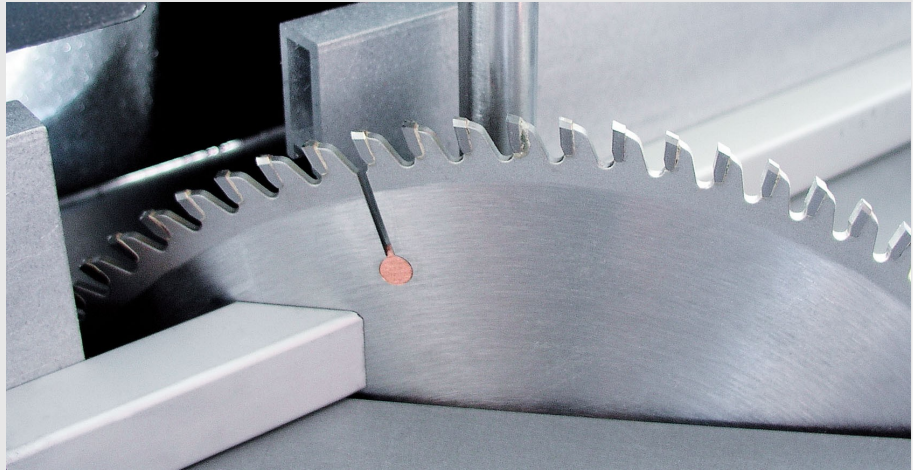

- Accuracy is achieved by cutting from below
- Wide pivoting range of up to 0° to the right and up to 45° to the left
- The special pivoting mechanism with integrated turn table enables working from the front at any angle position
- The workpiece stop is adjustable to allow optimal use of the saw blade capacity for wide and flat profiles
- Manual saw feed
- Manual material clamping unit (vertical)
- Equipped with saw blade as standard
- Table-top unit

#### TABLE SAW TS 161/21

See TS 161/00, however:

- With machine base
- Pneumatic material clamping unit (vertical)
- Pulsed coolant system
- Maintenance unit

#### TABLE SAW TS 161/30

See TS 161/21, however:


- Pneumatic saw feed
- Manual safety hood
- Length 650 mm, depth 750 mm, height 1,300 mm, weight 170 kg

#### Options


- Digital display for pivoting angles
- Manual safety hood
- Extraction system
- Length stop and measuring systems
- Roller conveyors
- Saw blades
- High performance cutting fluid



**Table saw TS 161/21**

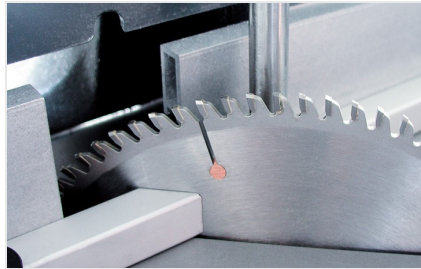

**Table saw TS 161/00**

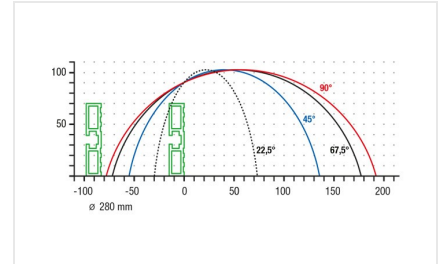


**Table saw TS 161**

Cutting diagram TS 161



**Table saw TS 161/30**

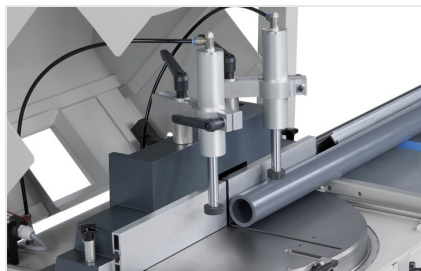


**Table saw TS 161/30**



**Table saw TS 161/30**




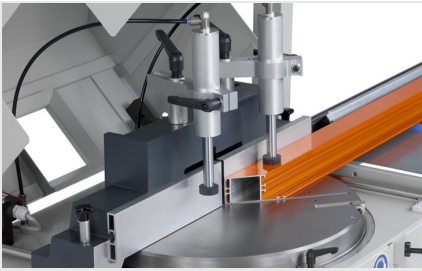


**Table saw TS 161/30**



**Table saw TS 161/30**

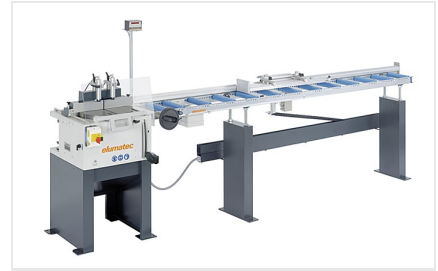

**Table saw TS 161/21 +  
MMS 200**

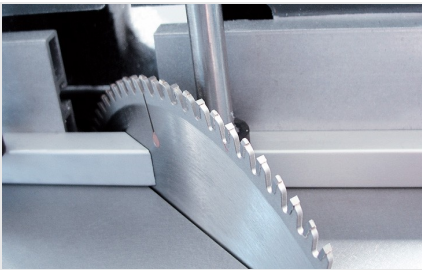

**Table saw TS 161/00**





### TS 161 / TABLE SAWS

---

- **TS 161/00 - TS 161/21 - TS 161/22 - TS 161/30 - TS 161/31**
- For cutting range, see cutting diagram
- Saw blade diameter 280 mm
- Saw blade speed 3,200 rpm
- Power supply 230/400 V, 3~, 50 Hz
- Power output 1.05 kW
- Length 650 mm, depth 750 mm, height 1,300 mm, weight 130 kg