




### VR3003

Vertical roller conveyors



Vertical roller conveyor for transportation and storage of window elements


- Stable steel construction
- Expandable using modular system design
- Vertical roller conveyor for smooth transportation and storage of window elements
- Easy handling of window elements
- Every roller conveyor unit is 3,000 mm long
- Roller conveyor divided into three parts
- Plastic slide bars top and bottom
- Three mini-roller conveyors with rubber rollers, diameter 50 mm
- Basic unit without end rack

#### Options

- End rack for VR 2003/3003/4003
- End stop for VR
- Lead-in roller for VR
- Profile protectors for support rollers (Alum.)




**Vertical roller conveyor  
VR 3003**

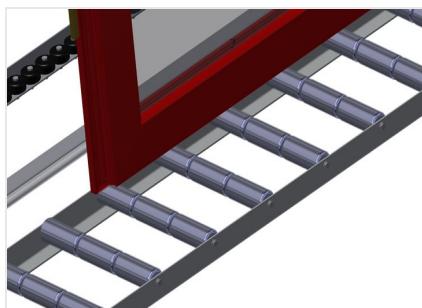


**Support rollers**

Rollers throughout, Roller conveyor divided into three parts, 3x 120 mm. Roller conveyor units, 2,000 mm, 3,000 mm and 4,000 mm long

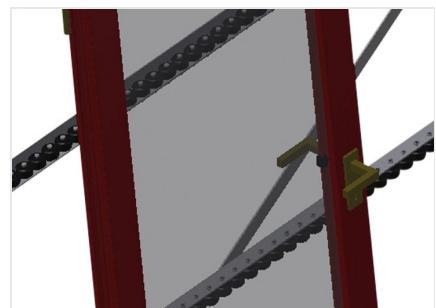

**Mini-roller conveyor**

Three mini-roller conveyors with rubber rollers, diameter 50 mm

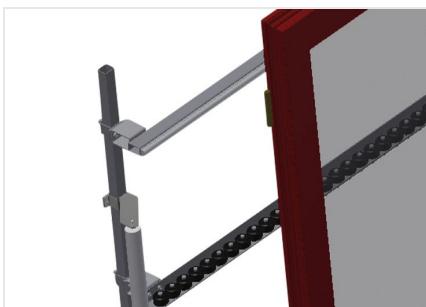


**Back support**

Rear back support with plastic slide bars, top and bottom



**Roller conveyor height  
adjustment**

Roller conveyor height adjustment

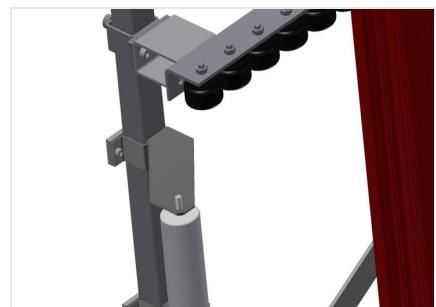


**Mini-roller conveyor  
height adjustment**

Mini-roller conveyor height is adjustable

**End rack**


End rack is mandatory at end of line

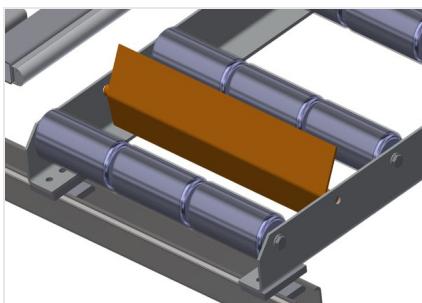**End stop**


End stop Rb = 3x 120 mm

**Lead-in rollers**

Protective rollers for beginning or end of roller conveyor L = 500 mm (pair) L = 250 mm (pair)

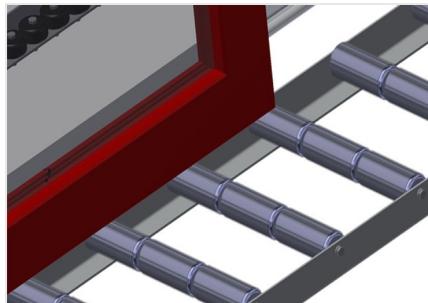**Profile protectors**

Profile protectors for support rollers 3x 120 mm (Alum./33 x and Alum./48 x). Support rollers covered with protective tubing

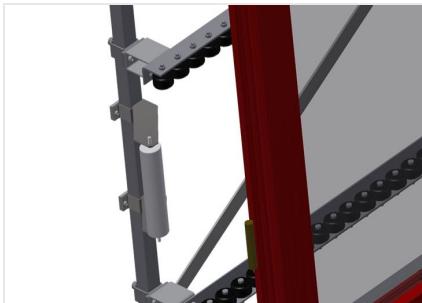**Additional mini-roller conveyors**

Additional mini-roller conveyors with rubber rollers top/bottom



elumatec AG  
Pinacher Straße, 61  
75417 Mühlacker  
Germany

Tel +49 7041-14-184  
sales@elumatec.com  
www.elumatec.com

The right to make technical alterations is reserved.

**VR 3003 / VERTICAL ROLLER CONVEYORS**

- Length 3,000 mm
- Width 900 mm
- Height 2,400 mm
- Support rollers divided into three parts 3 x 120 mm
- Unit height 2,100 mm
- Load 200 kg
- Weight 120 kg