


TECHNICAL SHEET

02/12/2025

VR**4000 DF**

Vertical roller conveyors

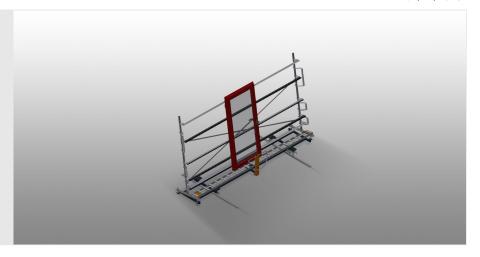

- Stable steel construction
- Vertical roller conveyor for smooth transportation to the next work task as well as for transportation to storage and sorting of the finished windows
- Easy handling of window elements
- Every roller conveyor unit is 4,000 mm long
- Plastic slide bars top and bottom
- Three mini-roller conveyors with rubber rollers, diameter 50 mm
- Basic unit with end rack
- Vertical roller conveyor on rails with flanged rollers, mobile
- Roller conveyor can be rotated 360°

Options

- Rail, 2.0 m, left and right
- End stop for VR
- Lead-in roller for VR
- Profile protectors for support rollers (Alum.)

elumatec AG Pinacher Straße, 61 75417 Mühlacker Germany Tel +49 7041-14-184 sales@elumatec.com

The right to make technical alterations is reserved.

1

elumatec

TECHNICAL SHEET


02/12/2025



Vertical roller conveyor with mobility and rotation mechanism VR 4000 DF



Support rollersRollers throughout, support roller width, 200 mm.



Mini-roller conveyorThree mini-roller conveyors with rubber rollers, diameter 50 mm



Back supportRear back support with plastic slide bars, top and bottom



Grip makes pushing the roller conveyor on the rails easy



Mobility unitMobility unit with flanged rollers and fixing brake



Tel +49 7041-14-184 sales@elumatec.com www.elumatec.com The right to make technical alterations is reserved.



TECHNICAL SHEET

02/12/2025



End stop

End stop Rb = 200 mm




Lead-in rollers

Protective rollers for beginning or end of roller conveyor L = 500 mm (pair) L = 250 mm (pair)



Profile protectors

Profile protectors for support rollers 200 mm (Alum./21 x). Support rollers covered with protective tubing



Additional mini-roller conveyors

Additional mini-roller conveyors with rubber rollers top/bottom



Rails

Rails, 2.0 m, left and right.



elumatec AG Pinacher Straße, 61 75417 Mühlacker Germany Tel +49 7041-14-184 sales@elumatec.com www.elumatec.com The right to make technical alterations is reserved.



TECHNICAL SHEET

02/12/2025

VR 4000 DF / VERTICAL ROLLER CONVEYORS

- Length 4,000 mm
- Width 1,000 mm
- Height 2,490 mm
- Support roller width 200 mm
- Unit height 2,100 mm
- Load 200 kg
- Weight 220 kg