

## VR4003 DF

Vertical roller conveyors




- Stable steel construction
- Vertical roller conveyor for smooth transportation to the next work task as well as for transportation to storage and sorting of the finished windows
- Easy handling of window elements
- Every roller conveyor unit is 4,000 mm long
- Plastic slide bars top and bottom
- Three mini-roller conveyors with rubber rollers, diameter 50 mm
- Basic unit with end rack
- Vertical roller conveyor on rails with flanged rollers, mobile
- Roller conveyor can be rotated 360°

### Options

- Rail, 2.0 m, left and right
- End stop for VR
- Lead-in roller for VR
- Profile protectors for support rollers (Alum.)




**Vertical roller conveyor with mobility and rotation mechanism VR 4003 DF**

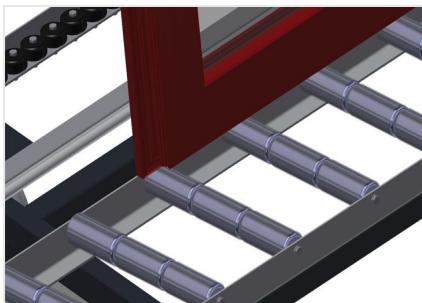


**Support rollers**

Rollers throughout, support roller width 3x 120 mm.

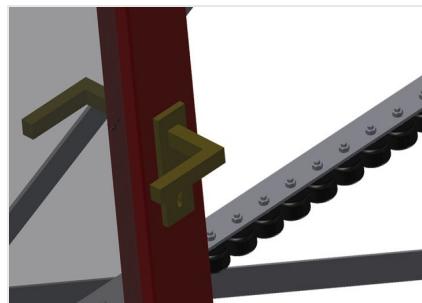


**Mini-roller conveyor**

Three mini-roller conveyors with rubber rollers, diameter 50 mm

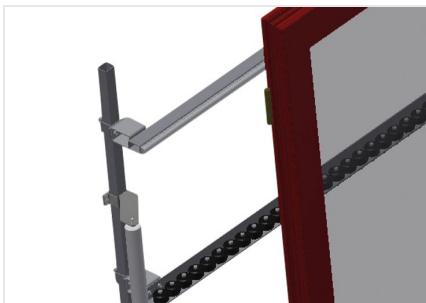


**Back support**

Rear back support with plastic slide bars, top and bottom

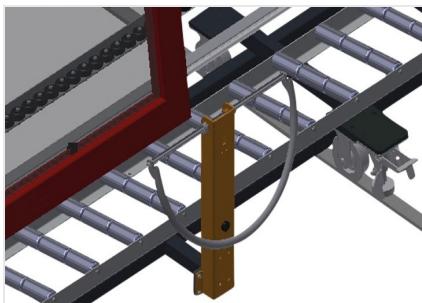


**Grip**

Grip makes pushing the roller conveyor on the rails easy

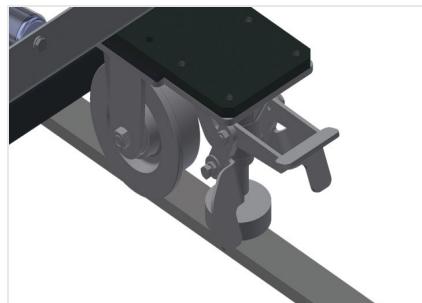


**Mobility unit**


Mobility unit with flanged rollers and fixing brake

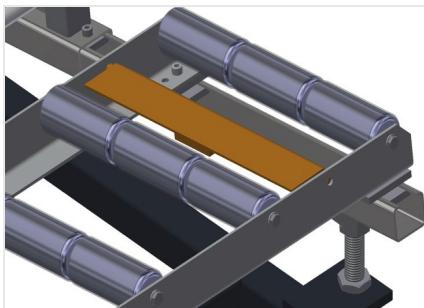**End stop**


End stop Rb = 3x 120 mm for VR

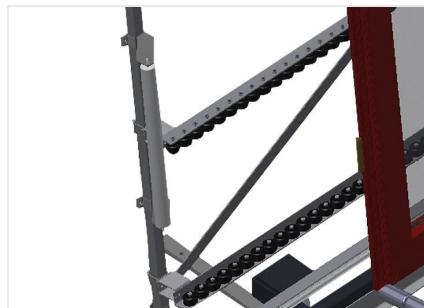**Lead-in rollers**

Protective rollers for beginning or end of roller conveyor L = 500 mm (pair) L = 250 mm (pair)

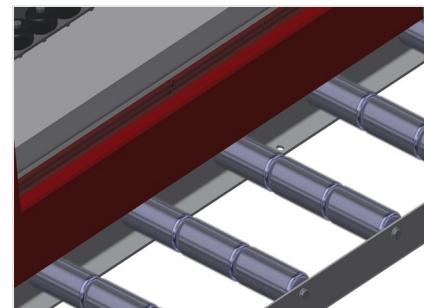**Profile protectors**

Profile protectors for support rollers 3x 120 mm (Alum./48 x and Alum./63 x). Support rollers covered with protective tubing

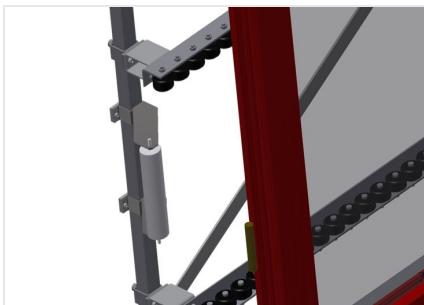**Additional mini-roller conveyors**

Additional mini-roller conveyors with rubber rollers top/bottom

**Rails**

Rails, 2.0 m, left and right.



elumatec AG  
Pinacher Straße, 61  
75417 Mühlacker  
Germany

Tel +49 7041-14-184  
sales@elumatec.com  
www.elumatec.com

The right to make technical alterations is reserved.

**VR 4003 DF / VERTICAL ROLLER CONVEYORS**

- Length 4,000 mm
- Width 1,000 mm
- Height 2,490 mm
- Support rollers divided into three parts 3 x 120 mm
- Unit height 2,100 mm
- Load 200 kg
- Weight 240 kg

elumatec AG  
Pinacher Straße, 61  
75417 Mühlacker  
Germany

Tel +49 7041-14-184  
[sales@elumatec.com](mailto:sales@elumatec.com)  
[www.elumatec.com](http://www.elumatec.com)

The right to make technical alterations is reserved.