DG 79

DOUBLE MITRE-SAWS



- The solid cast construction with integrated turn table ensures optimal profile support for cutting to length with angular accuracy
- Continuous pivoting range adjustment of the saw heads from 0° to 45° to the left and right. This makes external and internal dimension cuts possible
- Vertical and horizontal pneumatic material clamping units ensures optimal profile fixation
- Equipped with saw blades as standard
- Equipped with digital display E 111 as standard
- Pulsed coolant system

Cutting length variants

- 3,000 mm
- 4,500 mm
- 6,000 mm

Options

- Workpiece supports
- Transom stop
- Extraction system
- Material clamping units
- Roller conveyors
- Saw blades
- High performance cutting fluid

elumatec AG
Pinacher Straße, 61
75417 Mühlacker
Germany

Tel +49 7041-14-184
sales@elumatec.com
www.elumatec.com

The right to make technical alterations is reserved.

Controller variants

- Manual cutting length adjustment with digital display E 111

elumatec AG
Pinacher Straße, 61
75417 Mühlacker
Germany

Tel +49 7041-14-184
sales@elumatec.com
www.elumatec.com

The right to make technical alterations is reserved.



Double mitre saw DG 79

DG 79 + E 111




Double mitre saw DG 79




Double mitre saw DG 79



Double mitre saw DG 79

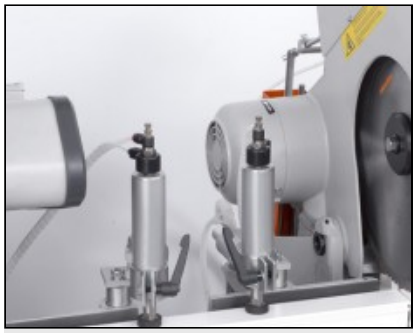

Double mitre saw DG 79

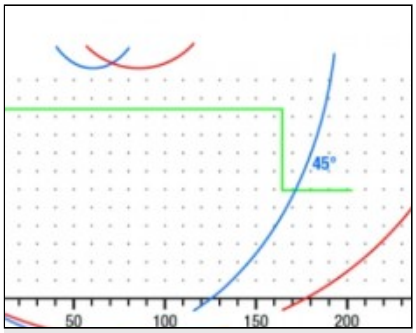

Double mitre saw DG 79

Cutting diagram DG 79

elumatec AG
Pinacher Straße, 61
75417 Mühlacker
Germany

Tel +49 7041-14-184
sales@elumatec.com
www.elumatec.com

The right to make technical alterations is reserved.