DW

TROLLEYS




Gasket trolley for gasket reels. Stable steel construction. 2/4 reel mounts, according to model. Indispensable for gasket insertion. Adjustable for any reel diameter. Tool tray. Four swivel castors, two of which with locking stop.

elumatec AG
Pinacher Straße, 61
75417 Mühlacker
Germany


Tel +49 7041-14-184
sales@elumatec.com
www.elumatec.com

The right to make technical alterations is reserved.

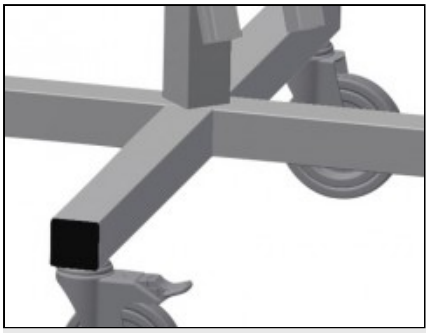


Casters

Four casters, two of which have a fixing brake, provide a high degree of mobility and easy, safe handling

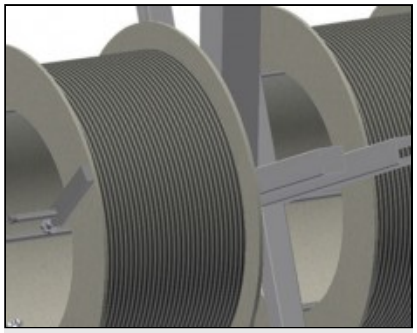


Reel mounts DW 2

For two gasket reels. Mounts adjustable for any reel size.

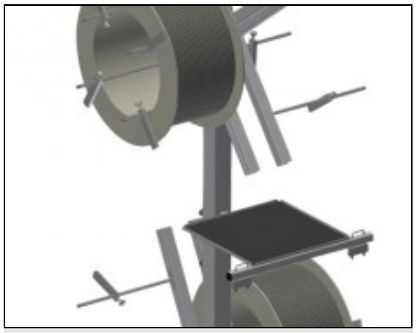


Reel mounts DW 4

For four gasket reels. Mounts adjustable for any reel size.

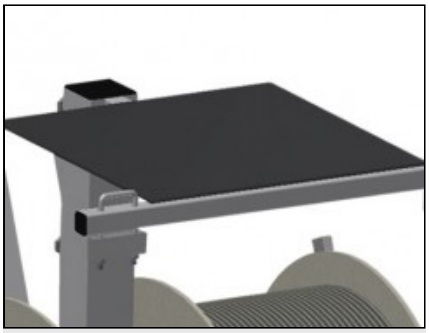

Storage area for tools

Practical tool tray located at working height

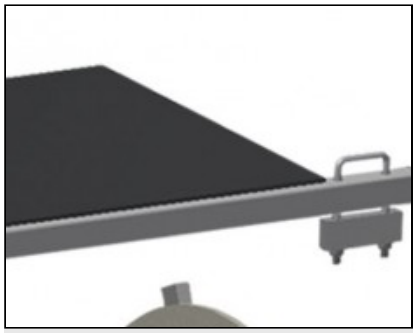

Unwinding brake

Unwinding brake for each reel

elumatec AG
Pinacher Straße, 61
75417 Mühlacker
Germany

Tel +49 7041-14-184
sales@elumatec.com
www.elumatec.com

The right to make technical alterations is reserved.

DW / TROLLEYS

MODELS

DW 2



DW 4



DIMENSION AND WEIGHT

DW 2 / DW 4	
Length (mm)	700
Width (mm)	700
Height (mm)	1.005 / 1.870
Weight (kg)	25 / 40

CHARACTERISTICS

DW 2 / DW 4	
Reel holder	2 / 4
Maximum reel diameter (mm)	750
Maximum reel width (mm)	250
Swivel castors	4
Swivel castors with locking stop	2
Swivel castors diameter (mm)	125

Included ● Available ○

elumatec AG
Pinacher Straße, 61
75417 Mühlacker
Germany

Tel +49 7041-14-184
sales@elumatec.com
www.elumatec.com

The right to make technical alterations is reserved.