


**GHS15**


Glass  
compartment/glazing  
bead trolleys



- Easy handling of sheets of glass in combination with glass transport trolley GFW 15
- With a pneumatic lifting unit controlled with a foot valve, max. travel = 50 mm
- Lower roller conveyors equipped with 15 x 4 PVC rollers in total
- Complete with draw-in mechanism for glass transport trolley GFW 15
- Basic dimensions: 2,100 x 1,250 mm

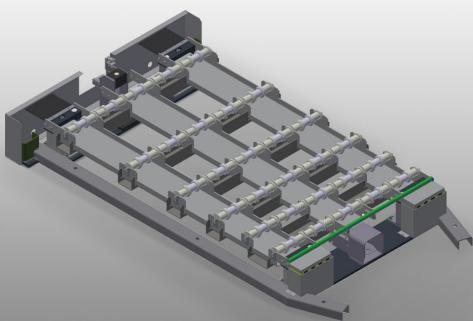


**Glass lifting station GHS 15**

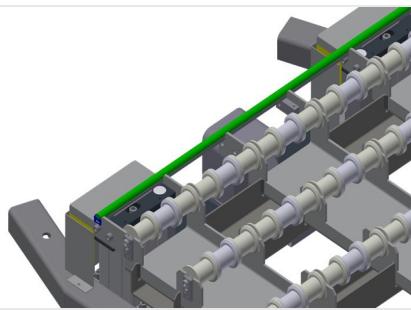

**Supports**

Lower supporting surfaces with lifting rollers for easier loading and unloading

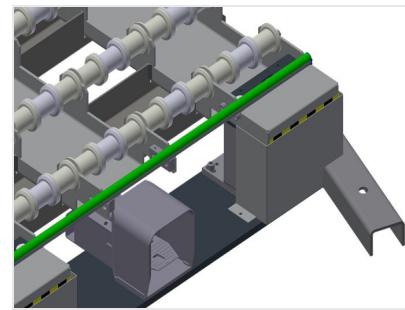

**Lifting unit**

Lifting unit for transferring sheets of glass to glass transport trolley GFW 15, controlled with a foot valve, max. travel = 50 mm



**Glass lifting station GHS 15 + Glass transport trolley GFW 15**



**Glass lifting station GHS 15 + Glass transport trolley GFW 15**

**GHS 15 / GLASS COMPARTMENT/GLAZING BEAD TROLLEYS**

- Length 2,100 mm
- Width 1,250 mm
- Height 250 mm
- Travel 50 mm max.
- Weight 100 kg

elumatec AG  
Pinacher Straße, 61  
75417 Mühlacker  
Germany

Tel +49 7041-14-184  
[sales@elumatec.com](mailto:sales@elumatec.com)  
[www.elumatec.com](http://www.elumatec.com)

The right to make technical alterations is reserved.