


HT3000

Horizontal assembly
tables

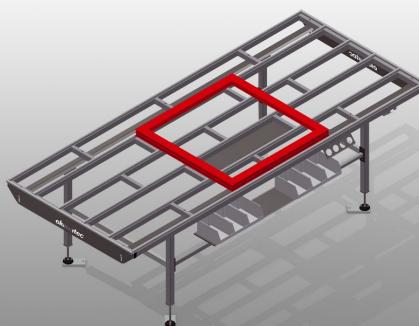


Horizontal table for all work tasks on frames and sashes


- Stable steel construction
- Assembly table for all work tasks on frames and sashes
- Table supporting surface with plastic slide bars
- Storage tray for setting down tools and accessories
- Adjustable height
- Simple installation with a modular system design

Options

- Also available with brush strips on request
- Also available with felt strips on request (for wooden elements)
- Also available with rubber strips on request (for aluminium elements)
- Roller support
- Tool rack
- 4-fold compressed air supply
- Storage area with six plastic trays




Horizontal table - Individual table HT 3000

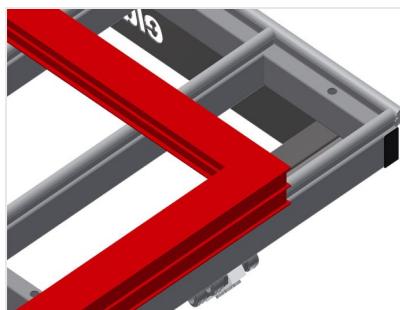

Supporting surfaces

Supporting surfaces with plastic slide bars

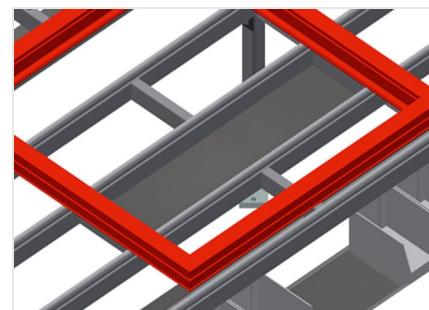


Storage tray

Storage tray for setting down tools and accessories



Height adjustment

Adjustable height, working height can be set to 850 - 1,000 mm by means of adjustable feet

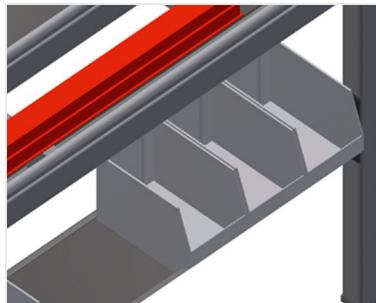

Storage area

Storage area with six plastic trays for small accessories, hardware and screws



Brush strip

Supporting surfaces with brush strip

**Felt strip**

Supporting surfaces with felt profile strip

**Rubber strips**


Supporting surfaces with rubber-knob profile for aluminium elements

**Tool rack**


Tool rack for pneumatic or electrical tools

**4-fold compressed air connection**


4-fold compressed air connection for connecting compressed-air tools

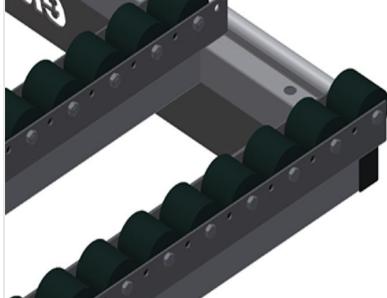**Roller support, cpl. for HT 3000/PVC**

Hard plastic rollers with polyamide coating, on plain bearings, load per roller: 60 kg, convenient for transport and handling of PVC elements

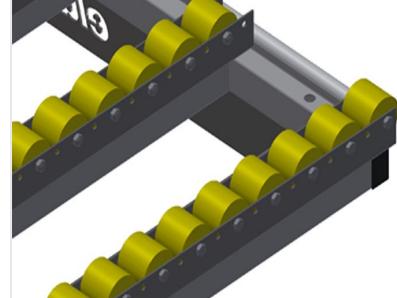**Roller support, cpl., for HT 3000/Alum.**

Plastic rollers with polyurethane coating, on ball bearings, load per roller: 40 kg, convenient for transport and handling of aluminium elements

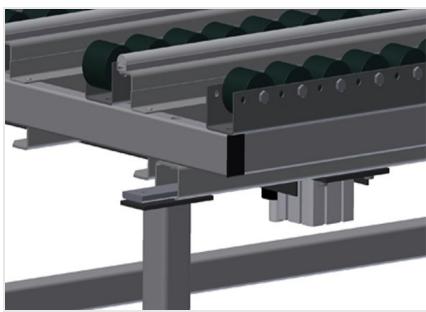

Pneumatic lifting unit

Lifting unit L = 3,000 mm

HT 3000 / HORIZONTAL ASSEMBLY TABLES

- Length 3,000 mm
- Width 1,300 mm
- Height 850 – 1,000 mm
- Weight 120 kg



elumatec AG
Pinacher Straße, 61
75417 Mühlacker
Germany

Tel +49 7041-14-184
sales@elumatec.com
www.elumatec.com

The right to make technical alterations is reserved.