

## MSA2400

### Assembly stands



Assembly station for all assembly tasks on special-order elements and curtain walls

- Stable steel construction
- Assembly table for all assembly tasks on special-order elements and curtain walls
- Pull-outs on two sides
- Assembly table is ideal for the assembly of larger elements
- The narrow design of the machine base provides good accessibility to the elements from all sides
- The assembly table is mobile
- Supporting surfaces with rubber profile
- The tables can be adapted to suit the elements optimally due to a large adjustment range of the supporting surfaces, i.e. by pulling out the supports and shifting the tables

#### Options

- Flanged rollers, cmpl., for MSA 2400 - Assembly lines
- Rail, 2.0 m, left and right
- Castors, cmpl., for MSA 2400 - Stand alone
- 4-fold compressed air supply
- Storage area, cmpl., for MSA 2400

#### Variants for assembly lines

- The rails, once adjusted to be level, provide a level supporting surface on which the tables can be moved.
- The tables can be moved and easily positioned on the rails.
- Two or more tables can be combined to enlarge the supporting surface to any extent desired.
- The tables are ideal for the assembly of large elements.
- When the tables are not needed, they can be pushed together and moved aside.
- There are supports with a parallelogram shape at the edges to allow profiles to be set down longitudinally

#### Stand-alone variants


- The narrow design of the machine base provides good accessibility to the elements from all sides
- A larger work area of the supporting surface can be achieved by pulling out the parallelogram-shaped supports
- The tables can be moved and easily positioned on castors
- Two tables can be combined to enlarge the supporting surface to any extent desired
- The tables are ideal for the assembly of large elements




**Assembly station MSA 2400**



**Pair of assembly stations  
MSA 2400**




**Pair of assembly stations  
MSA 2400 + G 3000 + S  
3000 + WKW 800**

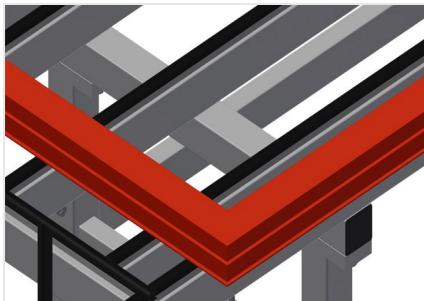

#### **Supporting surfaces**

Supporting surfaces equipped with rubber profile to protect profiles from damage

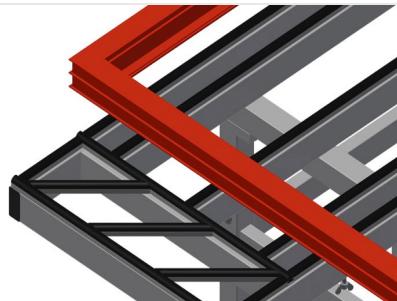

#### **Supports**

Supporting surfaces with rubber profile. The supports at the edges have a parallelogram shape to allow profiles to be set down longitudinally. Pull-out supports on the side: 900 mm



#### **Casters, compl.**


Two casters with brake and two fixed rollers provide mobility in all directions

**Flanged rollers, cmpl.**


Mobility unit with four flanged rollers and two fixing brakes

**Rails**

Rails, 2.0 m, left and right

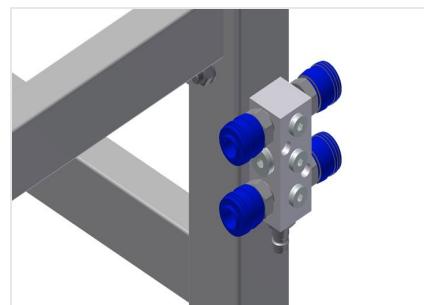**4-fold compressed air connection**

4-fold compressed air connection for connecting compressed-air tools

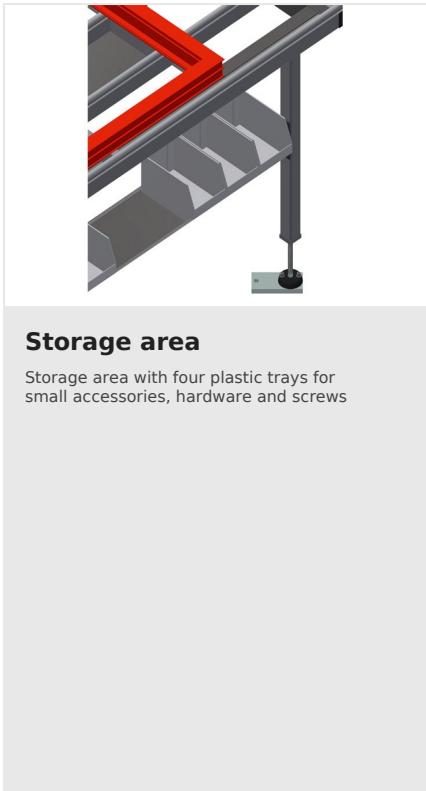**Storage area**

Storage area with four plastic trays for small accessories, hardware and screws



elumatec AG  
Pinacher Straße, 61  
75417 Mühlacker  
Germany

Tel +49 7041-14-184  
sales@elumatec.com  
www.elumatec.com

The right to make technical alterations is reserved.

**MSA 2400 / ASSEMBLY STANDS**

- Length 2,400 mm
- Width 600 mm
- Height 850 - 1,000 mm
- Supporting surface 600 x 2,400 mm
- Pulled out 600 x 4,200 mm
- Weight 80 kg
- Load 600 kg



elumatec AG  
Pinacher Straße, 61  
75417 Mühlacker  
Germany

Tel +49 7041-14-184  
[sales@elumatec.com](mailto:sales@elumatec.com)  
[www.elumatec.com](http://www.elumatec.com)

The right to make technical alterations is reserved.