





RMT

Tilting tables

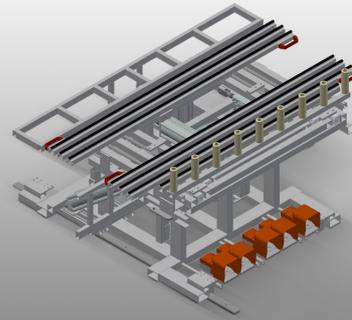


Stable steel construction. Tilting assembly table with draw-in unit. Basic dimensions 1,400 x 2,000 mm, when pulled out 2,000 x 2,800 mm. Pull-out work platform consisting of two supporting beams, clad with brush strip. Minimum size of work platform 2,000 x 1,000 mm. Maximum size of work platform 2,800 x 2,000 mm. Two supporting beams form a frame, the height of which can be adjusted pneumatically and continuously from 1,000 to 2,000 mm. Lifting and tilting unit with foot valve. Fixed roller conveyor with lifting unit, 100 mm. Lifting unit for transferring / receiving from the roller conveyor. Roller conveyor open at front for drawing in to transfer roller conveyor. Mobility unit with flanged rollers and pneumatic fixing brake with operation from side. Optional: Table supporting surface with felt profile strip for RMT 1400. Auxiliary clamp with hand valve.

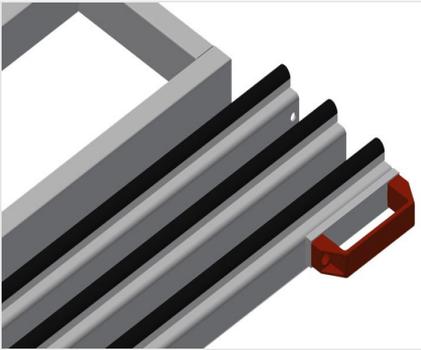


Supporting surface

Table supporting surface with brush strips

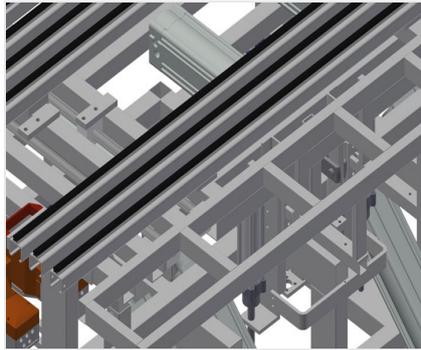


Worktable

Height of support table adjustable to 230 mm below the work surface. Depth of support table 250 mm, length 2,000 mm

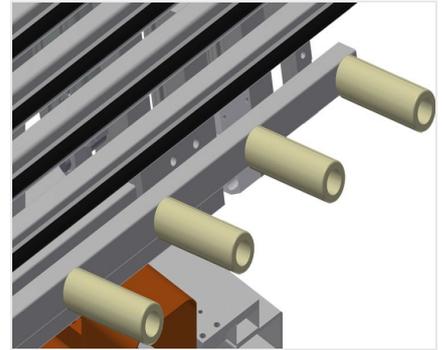


Roller support

Roller conveyor open at front for drawing in to transfer roller conveyor. Fixed roller conveyor with lifting unit, 100 mm Lifting unit for transferring / receiving from the roller conveyor.

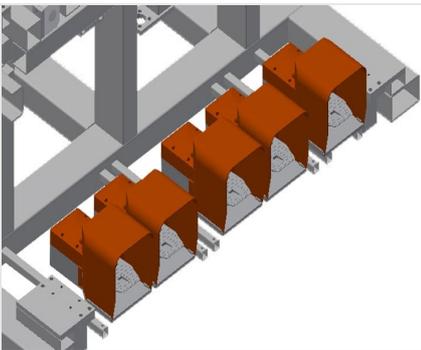


Foot switch

Control via foot valve. Lifting and tilting unit with foot valve

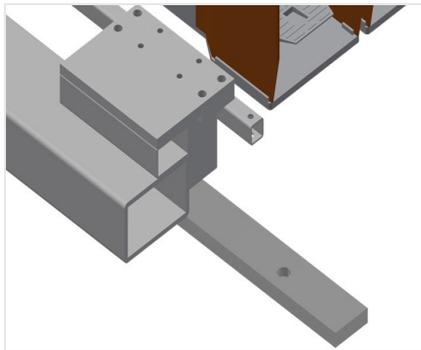

Mobility unit

Mobility unit with flanged rollers and pneumatic fixing brake with operation from both sides

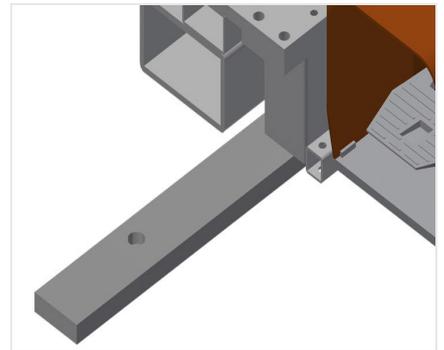

Rail


Rails, 2.0 m, left and right





Felt strip

Supporting surfaces with felt strip

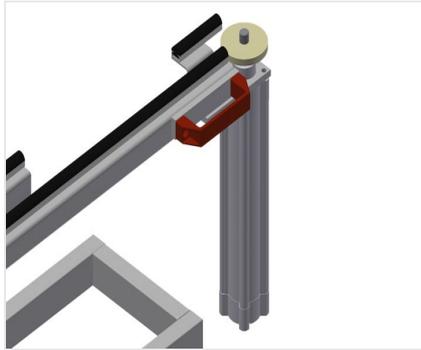

Auxiliary clamp

Auxiliary clamp with hand valve for RMT 1400. Auxiliary clamps provide extra security when machining.





RMT / TILTING TABLES

MODELS

DIMENSION AND WEIGHT

Length (mm)	<input type="radio"/>
Width (mm)	<input type="radio"/>
Height (mm)	<input type="radio"/>

SUPPORTING SURFACE

Length of support table (mm)	<input type="radio"/>
Depth of support table (mm)	<input type="radio"/>
Working height (mm)	<input type="radio"/>
Tilt of supporting surface	<input type="radio"/>
Roller conveyor length (mm)	<input type="radio"/>
Roller diameter (mm)	<input type="radio"/>
Roller length (mm)	<input type="radio"/>
Load capacity (kg)	<input type="radio"/>

Included ● Available ○