
TS 161

SINGLE MITRE-SAWS

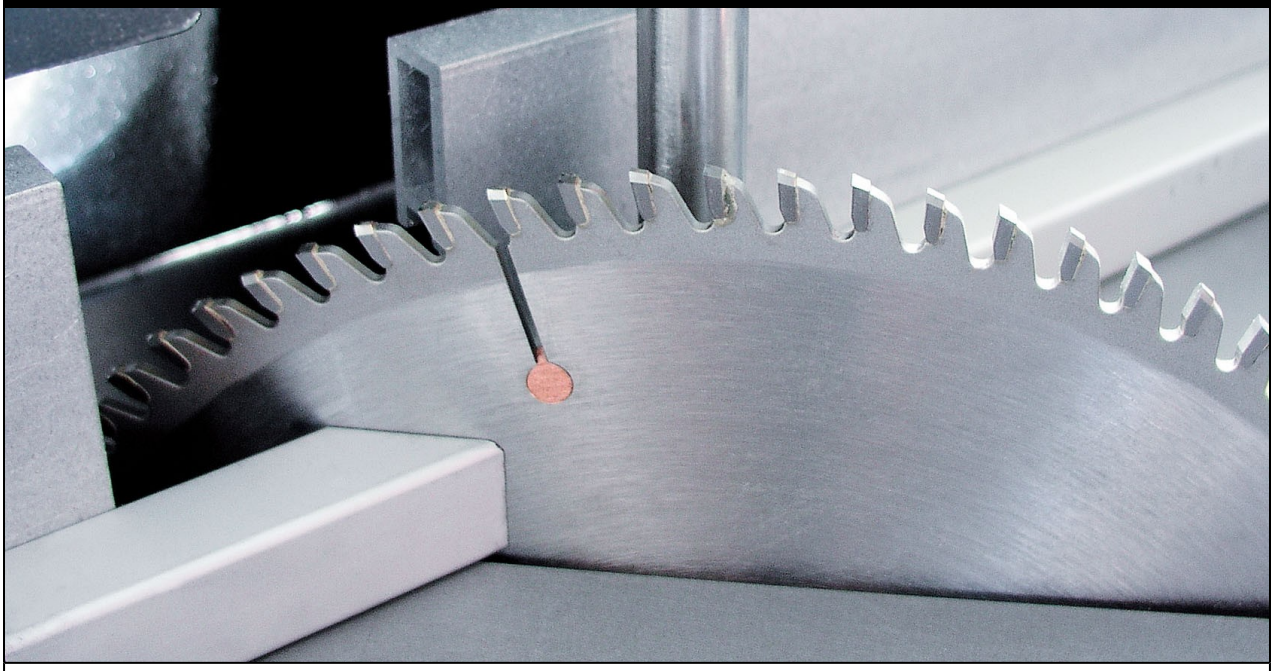

- Accuracy is achieved by cutting from below
- Wide pivoting range of up to 0° to the right and up to 45° to the left
- The special pivoting mechanism with integrated turn table enables working from the front at any angle position
- The workpiece stop is adjustable to allow optimal use of the saw blade capacity for wide and flat profiles
- Manual saw feed
- Manual material clamping unit (vertical)
- Equipped with saw blade as standard
- Table-top unit

TABLE SAW TS 161/21

See TS 161/00, however:

- With machine base
- Pneumatic material clamping unit (vertical)
- Pulsed coolant system
- Maintenance unit

TABLE SAW TS 161/30

See TS 161/21, however:

- Pneumatic saw feed
- Manual safety hood
- Length 650 mm, depth 750 mm, height 1,300 mm, weight 170 kg

Options

- Digital display for pivoting angles
- Manual safety hood

elumatec AG
Pinacher Straße, 61
75417 Mühlacker
Germany

Tel +49 7041-14-184
sales@elumatec.com
www.elumatec.com

The right to make technical alterations is reserved.

- Extraction system
- Length stop and measuring systems
- Roller conveyors
- Saw blades
- High performance cutting fluid

elumatec AG
Pinacher Straße, 61
75417 Mühlacker
Germany

Tel +49 7041-14-184
sales@elumatec.com
www.elumatec.com

The right to make technical alterations is reserved.



Table saw TS 161/21

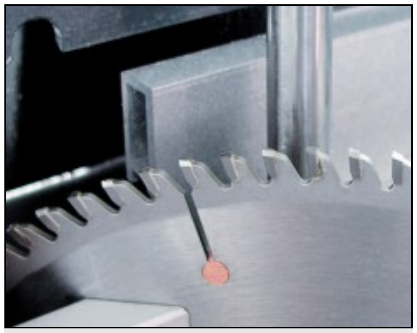


Table saw TS 161/00

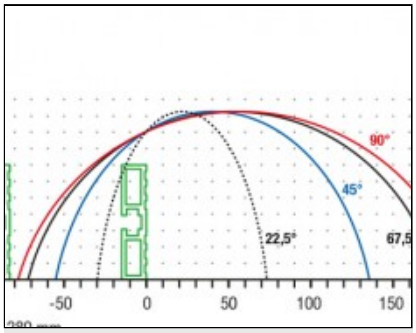


Table saw TS 161

Cutting diagram TS 161



Table saw TS 161/30

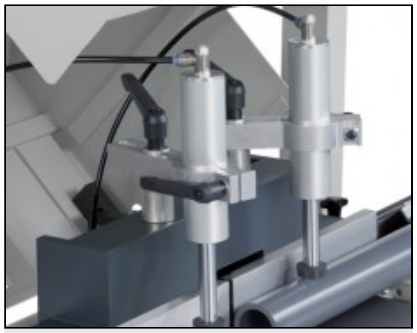


Table saw TS 161/30

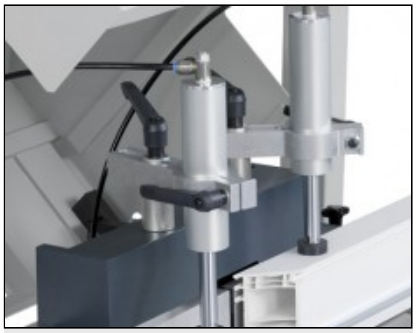


Table saw TS 161/30

elumatec AG
Pinacher Straße, 61
75417 Mühlacker
Germany

Tel +49 7041-14-184
sales@elumatec.com
www.elumatec.com

The right to make technical alterations is reserved.



Table saw TS 161/30



Table saw TS 161/30



Table saw TS 161/21 + MMS 200



Table saw TS 161/00

elumatec AG
Pinacher Straße, 61
75417 Mühlacker
Germany

Tel +49 7041-14-184
sales@elumatec.com
www.elumatec.com

The right to make technical alterations is reserved.