



### *TS161/21*

#### TABLE SAWS



- Accuracy is achieved by cutting from below for 90° saw cuts and angled cuts
- Wide pivoting range of up to 45° to the left and 0° to the right
- The special pivoting mechanism with integrated turn table enables working from the front at any angle setting
- The back fence is adjustable to allow optimal use of the saw blade capacity for wide and flat profiles
- Manual saw feed
- Equipped with saw blade and machine base as standard
- Pneumatic material clamping (vertical)
- Pulsed coolant system
- Maintenance unit

#### Options


- Digital display for pivoting angles
- Extraction system
- Length stop and measuring systems
- Roller conveyors
- High performance cutting fluid




**Table saw TS 161/21**




**Table saw TS 161/21 +  
MMS 200**

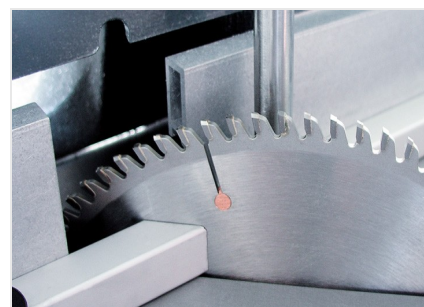

**Table saw TS 161/21**

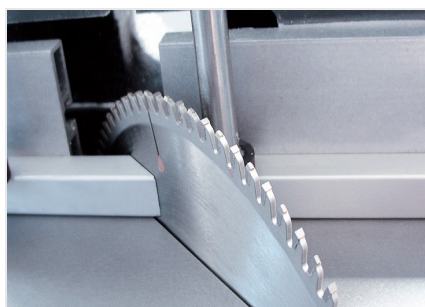

**Table saw TS 161/21**

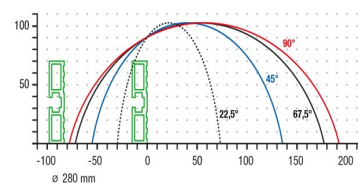

**Table saw TS 161/21**

Cutting diagram TS 161/21



### **TS 161/21 / TABLE SAWS**

---

- For cutting range, see cutting diagram
- Saw blade diameter 280 mm
- Saw blade speed 3,200 rpm
- Power supply 230/400 V, 3~, 50 Hz
- Power output 1.05 kW
- Length 650 mm, depth 750 mm, height 1,300 mm, weight 130 kg